

**8 channel fuse module with visual alarm and alarm output for fuse blown indication**

**High current rating, up to 10A per channel (max 20A for module)**

**DIN rail mounting**

**Various range of fuse sizes available**

## Introduction

The FSC-930 fuse blown indicating module is a DIN rail mounting module, that allows users up to 8 common fused supply outlets. Each fused channel can handle up to 10A, however a maximum of only 20A max is allowed for the module. Fuses are available in 18 different ratings (see page 3) and should be ordered separately


## General Ratings

Storage temperature	-20 to +70 °C
Operating temperature	0 to 70 °C
Humidity	10-95% RH (non-condensing)
Dimensions	68mm width (along rail) 78mm depth (across rail) 45mm height
Weight	100g
Screw terminal wire gauge	Up to 2.5mm <sup>2</sup>
Voltage rating	Up to 60Vdc
Output Current	10A per channel (max 20A for module)
Unit mounting	The unit can be mounted on all standard NS32 and NS35 DIN rail profiles to EN50 045, EN50 035 and EN50 022 standards





### Connections:

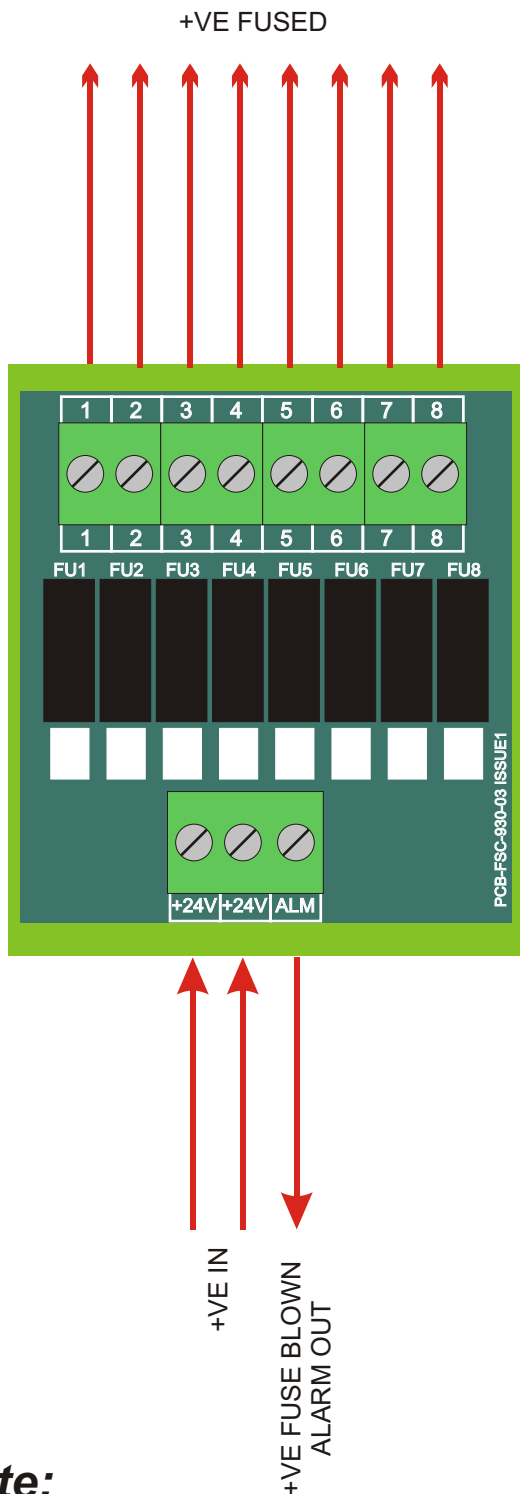

### Important Note:

Modules supplied without GMT fuses. IMPORTANT Customer should note that when fitting the GMT fuses they must not be forced down in position. See Bussmann data sheets for fitment details. A correctly positioned fuse will have the top flat edge of fuse approximately 7.7mm above the top edge of the module mounted fuse holder to which it is fitted.



Data Sheet Issue: 2.00

Date: 12 January 2009

## Order Codes

<u>Part Number</u>	<u>Description</u>
FSC-930	FSC-930 Module (no fuses)
GMT-0.18A	0.18A Fast Acting Fuse
GMT-0.25A	0.25A Fast Acting Fuse
GMT-0.38A	0.38A Fast Acting Fuse
GMT-0.50A	0.50A Fast Acting Fuse
GMT-0.65A	0.65A Fast Acting Fuse
GMT-0.75A	0.75A Fast Acting Fuse
GMT-1.00A	1.00A Fast Acting Fuse
GMT-1.33A	1.33A Fast Acting Fuse
GMT-1.50A	1.50A Fast Acting Fuse
GMT-2.00A	2.00A Fast Acting Fuse
GMT-3.00A	3.00A Fast Acting Fuse
GMT-3.50A	3.50A Fast Acting Fuse
GMT-4.00A	4.00A Fast Acting Fuse
GMT-5.00A	5.00A Fast Acting Fuse
GMT-7.50A	7.50A Fast Acting Fuse
GMT-10.0A	10.0A Fast Acting Fuse
GMT-12.0A	12.0A Fast Acting Fuse
GMT-15.0A	15.0A Fast Acting Fuse

### COLTER GROUP

## COLTER PRODUCTS LIMITED

UNIT 7, ZONE C  
CHELMSFORD ROAD INDUSTRIAL ESTATE  
DUNMOW  
ESSEX  
CM6 1HD

Telephone: + 44 (0)1371 876887

Fax: + 44 (0)1371 875638

E-Mail: [sales@coltergroup.co.uk](mailto:sales@coltergroup.co.uk)Web Site: [www.coltergroup.co.uk](http://www.coltergroup.co.uk)

© Copyright 2002

The unit described on this datasheet is designed and manufactured in Great Britain by Colter Products Ltd.  
Colter Products reserve the right to amend these specifications and the user is asked to check the validity of the datasheet prior to use